


SCON 022X CONNECTIONS

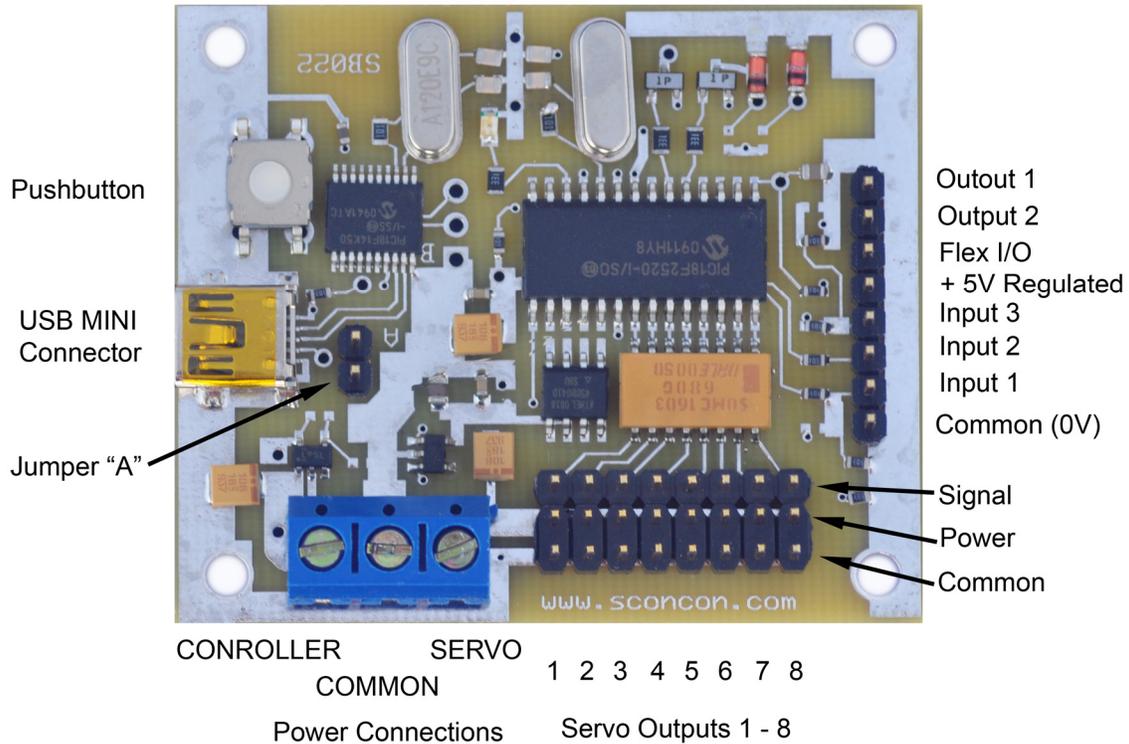

Recommended controller power is 5.5 - 12 Volts DC

Servo Power as required, may be connected to controller power if power source is appropriate.

Flex I/O is a direct connection to the microcontroller and must be used accordingly.

Output 1 and Output 2 are open collector drivers. Consult the manual for additional information.

Inputs 1 – 3 are buffered inputs. Load resistance is 10K ohms to Common.

+5 Volt Regulated power on the I/O connector is limited to 100MA